


REMCO

RM12-0.8 12V, 0.8Ah


NON-SPILLABLE SEALED RECHARGEABLE BATTERY

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 0.8 Ah	20 hr @ 0.04 A : 0.8 Ah
● DIMENSIONS	10 hr @ 0.072 A : 0.72 Ah
TOTAL HEIGHT : 62.4 mm (2.46 inches)	5 hr @ 0.128 A : 0.64 Ah
CONTAINER HEIGHT : 62.4 mm (2.46 inches)	1 hr @ 0.48 A : 0.48 Ah
LENGTH : 96 mm (3.78 inches)	1 C @ 0.8 A : 0.4 Ah
WIDTH : 25 mm (0.98 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 160 mΩ
WEIGHT : APPROX 0.37 kg (0.82 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 8 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 24 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : PI-03,PI-04	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 0.24 A


Discharge Characteristics 25 °C (77 °F)

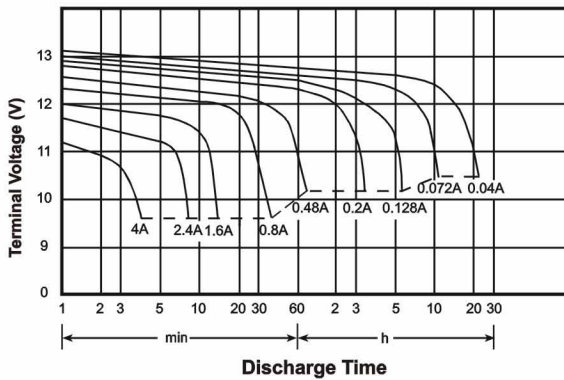

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

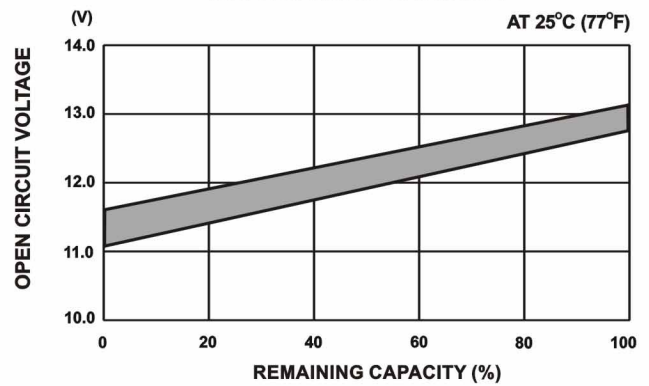

☆ Dimensions

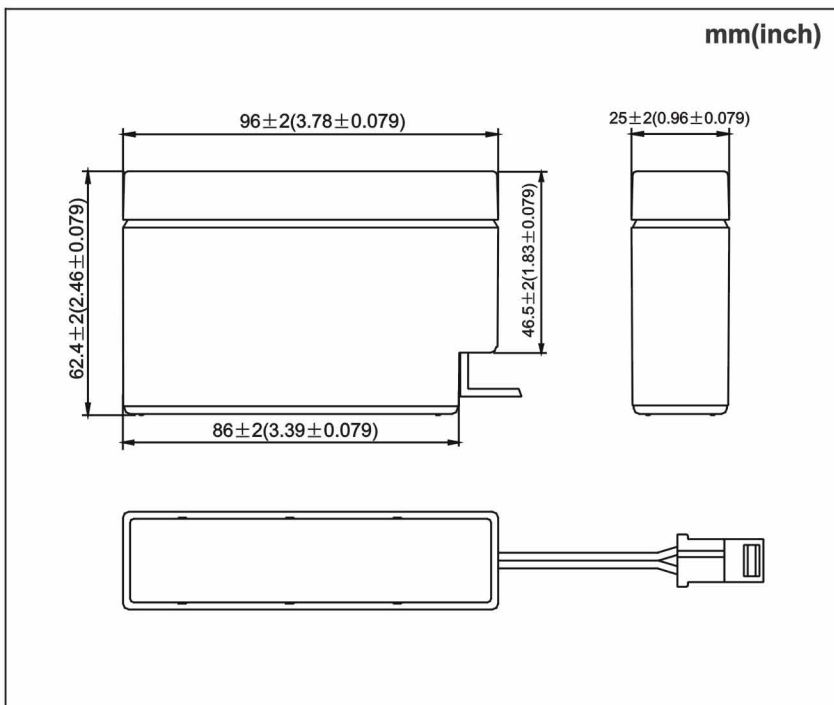

☆ Terminal

