



### NON-SPILLABLE SEALED RECHARGEABLE BATTERY

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 18.0 Ah	20 hr @ 0.9 A : 18 Ah
● DIMENSIONS	10 hr @ 1.62 A : 16.2 Ah
TOTAL HEIGHT : 167 mm ( 6.58 inches )	5 hr @ 2.88 A : 14.4 Ah
CONTAINER HEIGHT : 167 mm ( 6.58 inches )	1 hr @ 10.8 A : 10.8 Ah
LENGTH : 181 mm ( 7.13 inches )	1 C @ 18 A : 9 Ah
WIDTH : 76.2 mm ( 3.0 inches )	● INTERNAL RESISTANCE( 25°C , 77 °F ) : 13 mΩ
WEIGHT : APPROX 5.85 kg ( 12.90 lbs )	● CHARGING VOLTAGE ( 25°C , 77 °F )
● MAX DISCHARGE CURRENT : 180 A ( 5 sec )	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 540 A( 0.1 sec )	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-01/RT-11/FO-21	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 5.4 A


Discharge Characteristics 25 °C (77 °F)

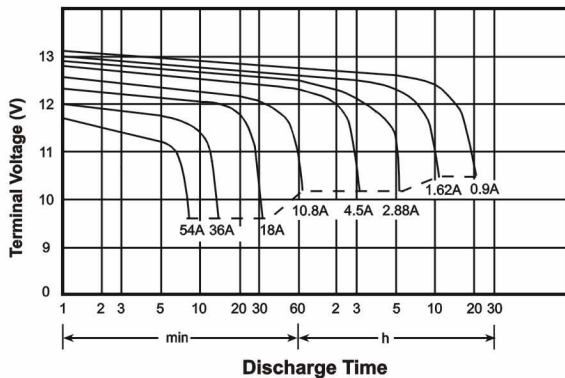

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

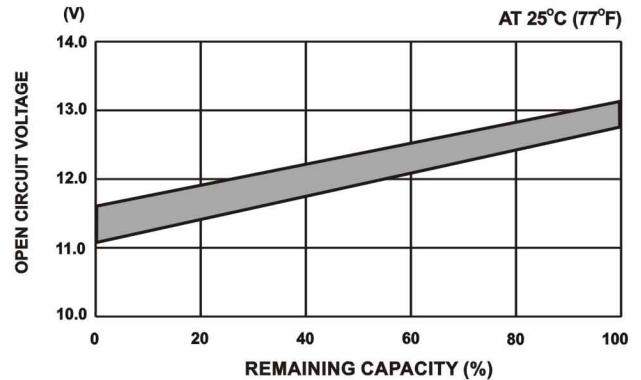

### ☆ Dimensions

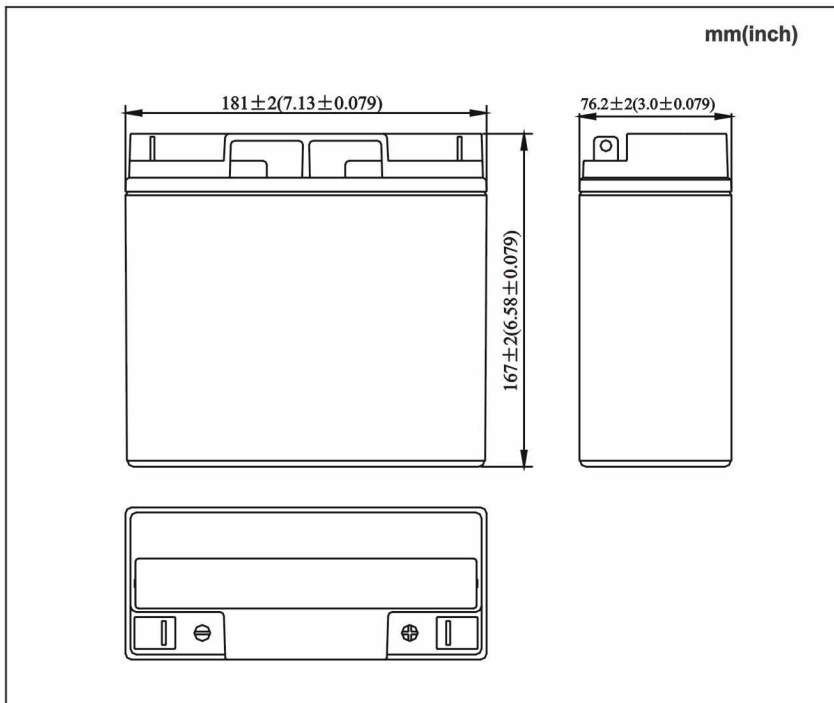

### ☆ Terminal

