


REMCO

RM12-2.2 12V, 2.2Ah


NON-SPILLABLE SEALED RECHARGEABLE BATTERY

| ☆ SPECIFICATION | ☆ CHARACTERISTICS |
|--|---|
| ● NOMINAL VOLTAGE : 12 V | ● CAPACITY 25 °C / 77 °F |
| ● NOMINAL CAPACITY(20 hrs) : 2.2 Ah | 20 hr @ 0.11 A : 2.20 Ah |
| ● DIMENSIONS | 10 hr @ 0.20 A : 1.98 Ah |
| TOTAL HEIGHT : 67 mm (2.64 inches) | 5 hr @ 0.35 A : 1.76 Ah |
| CONTAINER HEIGHT : 60 mm (2.36 inches) | 1 hr @ 1.32 A : 1.32 Ah |
| LENGTH : 178 mm (7.01 inches) | 1 C @ 2.2 A : 1.10 Ah |
| WIDTH : 35 mm (1.38 inches) | ● INTERNAL RESISTANCE(25°C , 77 °F) : 60 mΩ |
| WEIGHT : APPROX 0.96 kg (2.12 lbs) | ● CHARGING VOLTAGE (25°C , 77 °F) |
| ● MAX DISCHARGE CURRENT : 20 A (5 sec) | STANDBY USE : 2.275 ± 0.025 V/CELL |
| ● MAX SHORT- DURATION DISCHARGE CURRENT : 60 A (0.1 sec) | : (-3.3mV / °C / CELL) |
| ● STANDARD TERMINALS : FO-01 | CYCLE USE : 2.45 ± 0.05 V/CELL |
| ● CONTAINER MATERIAL : GENERAL GRADE ABS | : (-5 mV / °C / CELL) |
| | ● MAX CHARGING CURRENT : 0.66 A |


Discharge Characteristics 25 °C (77 °F)

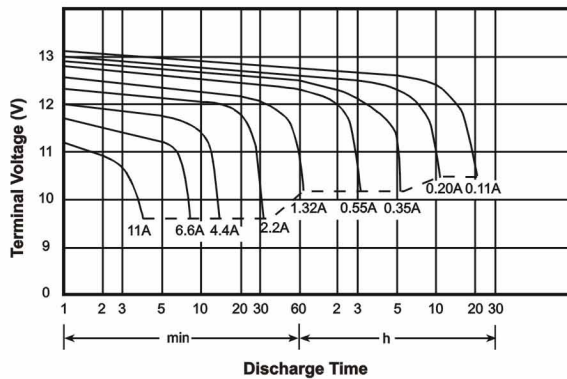

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

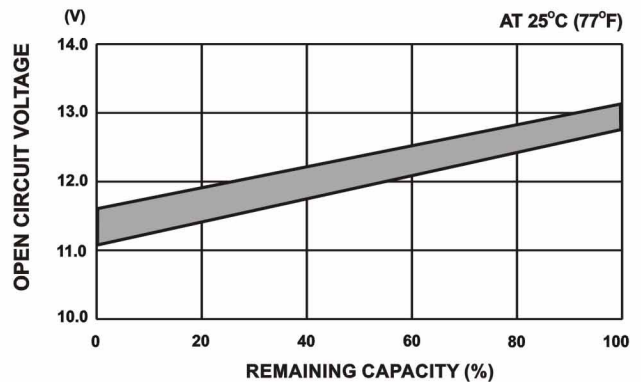

☆ Dimensions

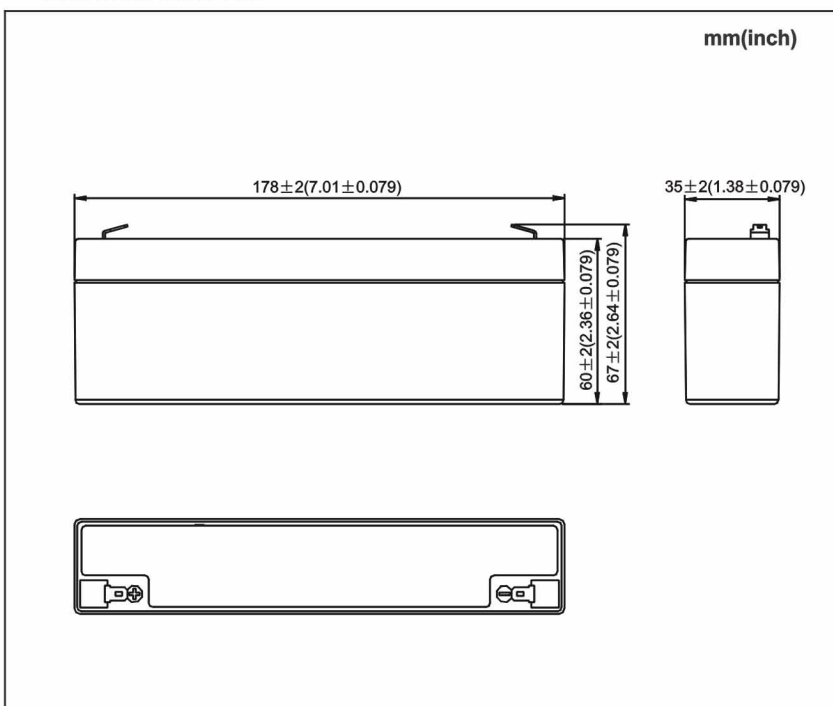

☆ Terminal

