

## Specification


Cells Per Unit	6
Voltage Per Unit	12
Capacity	14Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 4.20 Kg (Tolerance ±5.0%)
Internal Resistance	Approx. 13.0 mΩ
Terminal	F1/F2
Max. Discharge Current	210A (5 sec)
Cold Cranking Ampere(CCA)	140A
Maxi. Charging Current	4.2A
Reference Capacity	C3 10.9AH C5 12.0AH C10 13.2AH C20 14.0AH
Float Charging Voltage	13.7 V~13.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RMX batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RMX14-12HRL model is specially designed for frequent discharge deep cycle application. By using the specially designed active material, strong grids and thick plate construction, the RMX14-12HRL model battery offers reliable performance in high load situations and could provide competitive cycle performance. It is suitable for Electric Vehicle and Golf cart, Floor Machines, Forklifts, Aerial lifts, Robotics, Marine, RV, Mobility and Medical Equipment, and most outdoor application.



## Dimensions

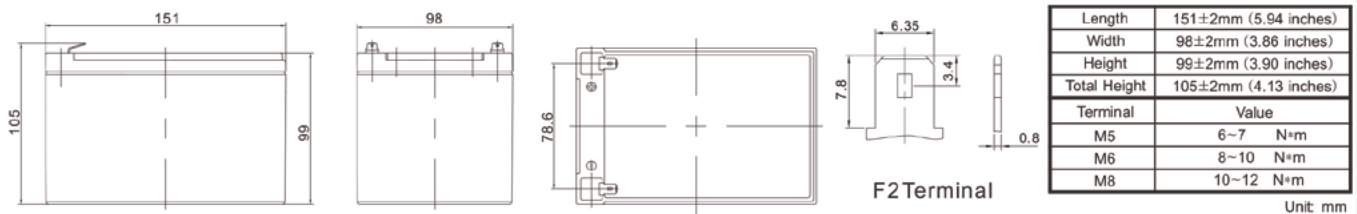

### Constant Current Discharge Characteristics : A(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	58.53	38.37	28.58	16.43	9.64	5.503	3.886	3.039	2.536	1.714	1.418	0.728
1.65V	56.37	37.10	27.73	16.09	9.46	5.409	3.827	2.997	2.505	1.695	1.403	0.721
1.70V	53.55	35.43	26.60	15.63	9.22	5.285	3.748	2.941	2.463	1.669	1.384	0.713
1.75V	49.80	33.20	25.09	15.01	8.89	5.115	3.639	2.865	2.405	1.634	1.358	0.700
1.80V	44.82	30.21	23.06	14.16	8.44	4.880	3.489	2.758	2.325	1.585	1.321	0.683
1.85V	38.10	26.13	20.26	12.95	7.79	4.544	3.273	2.604	2.208	1.513	1.267	0.658


### Constant Power Discharge Characteristics : WPC(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	99.26	65.23	49.97	29.84	18.03	10.43	7.42	5.83	4.89	3.35	2.79	1.43
1.65V	98.12	64.73	49.49	29.65	17.88	10.33	7.35	5.78	4.85	3.32	2.76	1.42
1.70V	94.26	62.51	47.90	28.98	17.48	10.12	7.22	5.69	4.78	3.27	2.73	1.41
1.75V	89.24	59.63	45.84	28.11	16.94	9.84	7.04	5.56	4.69	3.21	2.68	1.38
1.80V	81.71	55.21	42.72	26.79	16.16	9.44	6.78	5.37	4.55	3.12	2.61	1.35
1.85V	70.69	48.60	38.07	24.75	15.03	8.83	6.39	5.09	4.33	2.99	2.51	1.30


(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C<sub>20</sub> should reach 95% after the first cycle and 100% after the third cycle.


### Charge Characteristic Curve for Cycle Use(IIUU)

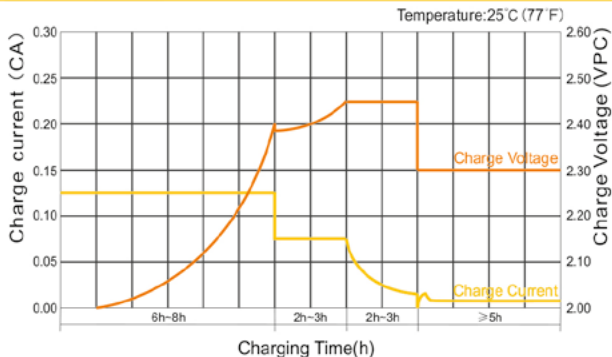


### Charge Characteristic Curve For Cycle Use(IUI)

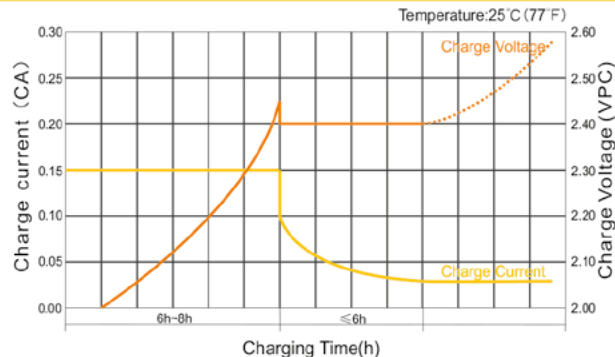


### Cycle Life in Relation to Depth of Discharge

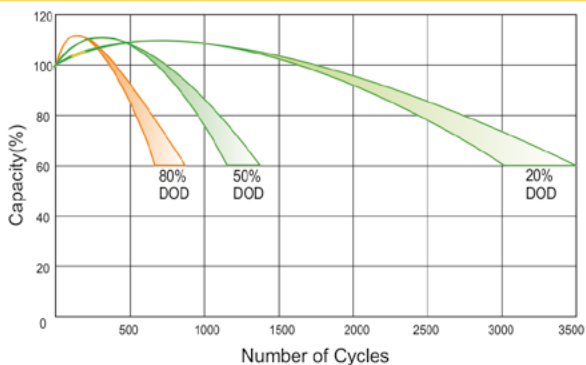


### Storage Characteristics

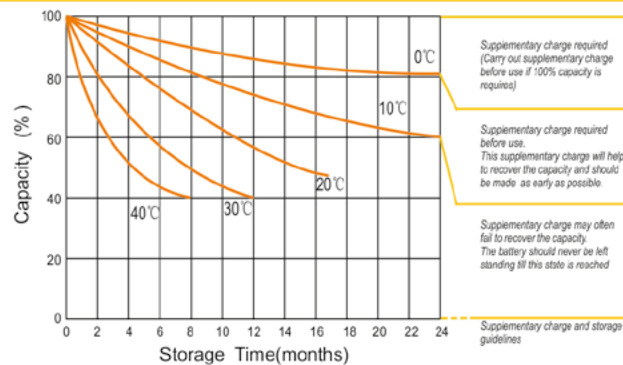


### Discharge Characteristics Curve

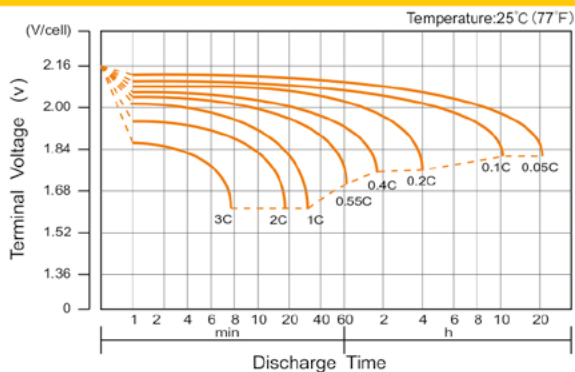

### Relationship Between Charging Voltage and Temperature

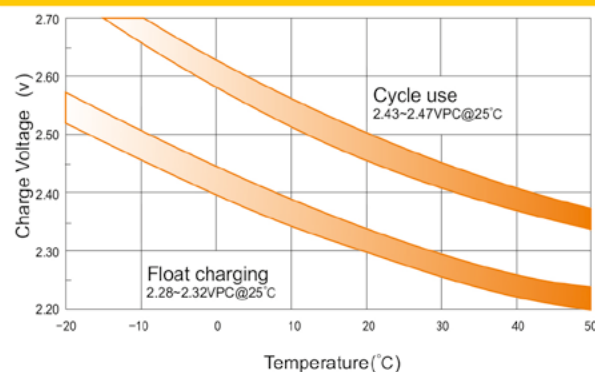

### Relationship of OCV And State of Charge(20°C)

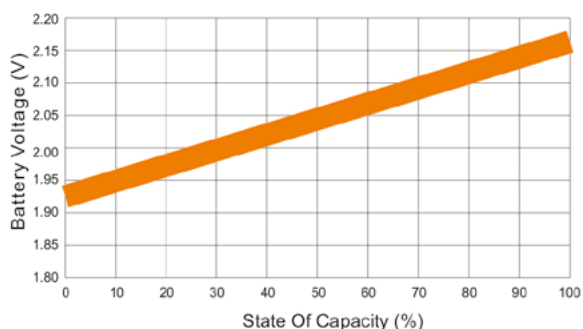

### Temperature Effects on Capacity

